



Limited One (1) Year Warranty

The Malone Auto Racks (Malone) Limited 1 Year Warranty covers certain Malone-brand products that have been specifically identified for inclusion in the program. This warranty is in effect for one (1) year, from the time of sale, for the original retail purchaser of the product. This warranty is terminated if the original retail purchaser sells or otherwise transfers the product to any other person or entity.

Subject to the limitations and exclusions described in this warranty, Malone will remedy defects in materials and/or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. Malone may elect, at its option, not to repair or replace a defective product but rather issue to the original retail purchaser a refund equal to the purchase price paid for the product, or credit to be used toward the purchase of a replacement Malone product.

This warranty does not cover, and no warranty is given for defects or problems caused by normal wear and tear, which includes, but is not limited to, surface (aesthetic) metal corrosion, scratches, dents, deformities, accidents, unlawful vehicle operation, or any modification of a product not performed or authorized in writing by Malone.

In addition, this warranty does not cover problems resulting from conditions beyond Malone's control including, but not limited to, theft, misuse, overloading, or failure to assemble, mount or use the product in accordance with Malone's written instructions or guidelines included with the product provided to the original retail purchaser.

No warranty is given for Malone products purchased outside of the continental United States, Canada and Mexico.

If the product is believed to be defective, the original retail purchaser should contact the Malone dealer from whom it was purchased, who will give the original retail purchaser instructions on how to proceed. If the original retail purchaser is unable to contact the Malone dealer, or the dealer is not able to remedy the defect, the original retail purchaser should contact Malone by email at technical@maloneautoracks.com.

In the event that the product must be returned to Malone, a technician at the email address above will provide the original purchaser with return shipping instructions. The original purchaser will be responsible for the cost of mailing the product to Malone. In order to be eligible to receive any remedy under this warranty, a copy of the original purchase receipt, a description of the defect and a return address must be provided.

Disclaimer of Liability

Repair or replacement of a defective product, or the issue of a refund or credit (as determined by Malone) is the original retail purchaser's sole and exclusive remedy under this warranty. Damage to original purchaser's vehicle, cargo, or property, and/ or to any other person or property is not covered by this warranty.

This warranty is expressly made in lieu of any and all other warranties, express or implied, including the warranties of merchantability and fitness for a particular purpose.

Malone's sole liability to any purchaser is limited to the remedy set forth above. In no event will Malone be liable for any direct, indirect, consequential, incidental, special, exemplary, or punitive damages, or, for any other damages of any kind or nature (including but not limited to, lost profits, lost income or lost sales).

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not be applicable.

In addition, all vehicular transports are potentially hazardous. Any person(s) using Malone products are personally responsible for following the given directions for use and/or installation and accepts full responsibility for any and all damages or injury of any kind including death, which may result from their use and/or installation.

DISCLAIMER * WARNING

All storage systems are potentially hazardous. Any persons using MALONE AUTO RACK products are personally responsible for following the given directions for use and installation and accepts full and complete responsibility for any and all damages or injury of any kind including death, which may result from use.

MALONE[®]



~ SLING™ SERIES

~ WALL & CEILING MOUNT STORAGE SYSTEM

~ MPG341 - 2 BOAT CAPACITY



CHANGING THE WAY YOU GET THERE

Important Note

Product Warranty & Registration Form

All information is confidential and used exclusively by MALONE only.

Dear Customer,

Thank you for your purchase of a Malone Product.

In order to be eligible for the Malone Warranty program, we ask that you contact us by email, telephone or online at one of the following: With-in 30 days of purchase. You can also mail this letter back to the address at the bottom.

- Online: www.maloneautoracks.com
- Tel: 1-207-774-9100 x215
- Email: Technical@maloneautoracks.com

We will require the information below.

Here is the information collected:

First Name: _____

Last Name: _____

Address: _____

Address2: _____

City: _____

State: _____

Zip: _____

Country: _____

Email: _____

Phone: _____

Product Description/Name: _____

Product MPG# or Serial # _____

Date Purchased: _____

Store Where Purchased: _____

Purchase Price: _____

Thank you for choosing Malone!

81 County Rd. Ste 1, Westbrook, ME 04092

P: 207.774.9100 F: 207.615.0551

E: sales@maloneautoracks.com W: www.maloneautoracks.com

Installation & Loading Instructions - Please Read Before Beginning

MPG341


(1) Left Side Strap Assembly with Quick-Connect Carabiners and Adjustment Buckle



(2) Stainless Steel Mounting Bolts for Ceiling or Wall



(1) Right Side Strap Assembly with Quick-Connect Carabiners and Adjustment Buckle

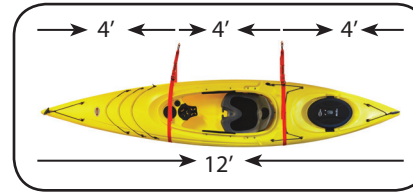

1. To determine the length required between the two Ceiling Mounting Bolts, measure the length of the longest boat to be stored and divide by 3.



2. The Ceiling Mounting Bolts must be attached to wall studs or ceiling rafters. If the studs or rafters are covered by drywall, use a stud locator to find. Using the distance calculated in the step above, mark the two hole locations. Using a 3/32" bit, drill pilot holes and screw the bolts inward until no threads are showing



3. Attach the Top Carabiners with Sling Assemblies to Mounting Bolts. Check to confirm that the location of the Bolts are high enough off the floor to accommodate the boats. We recommend that you test the strength of each Mounting Bolt by firmly pulling down on the Straps before continuing with the installation.


Hanger style storage systems are designed to be a low cost alternative to more traditional metal storage racks.

For safety reasons, we highly recommend that two people be available to load and unload boats.

Precautions and Disclaimer: • Check all straps and hardware connections before each and every use.

- Use only in areas clear of any potential hazards (never install or use in walkways or work areas. Don't walk or stand under a raised load).
- Maximum distributed weight limit is 135 lb. (67.5 lb. per strap).

4. Load the top tier first. On one Webbing Strap, Fasten Webbing Carabiner to Create a Single Loop. Adjust Buckles For Required Loop Lengths

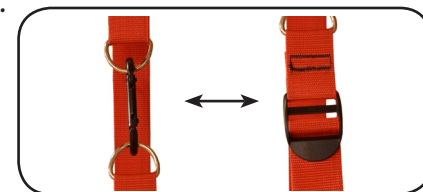

5. Insert one end of the boat into the webbing loop created above. Adjust Buckles For Required Loop Lengths



6. Holding the other end of the boat, lock the Carabiner to create the opposite support loop. Adjust the boat to confirm balance. Lift the boat and pull the free ends to adjust the height. Never pull the free ends down under the full weight of the boat. Repeat for the second storage tier and boat.

